

COUPLINGS

HN-3 SERIES



Features:

- Dry-break design
- High pressure capability
- Virtually zero spillage and air inclusion
- Heavy duty construction withstands high impulses and shocks
- Superior flow characteristics with low pressure drop

Pressures:

To 10,000 psig (690 bar)

Sizes:


1/8" through 2"

Materials:

Steel with platings or coatings to customer specifications and stainless steel to meet your pressure and environmental requirements

Shut-off Combination:

Double shut-off

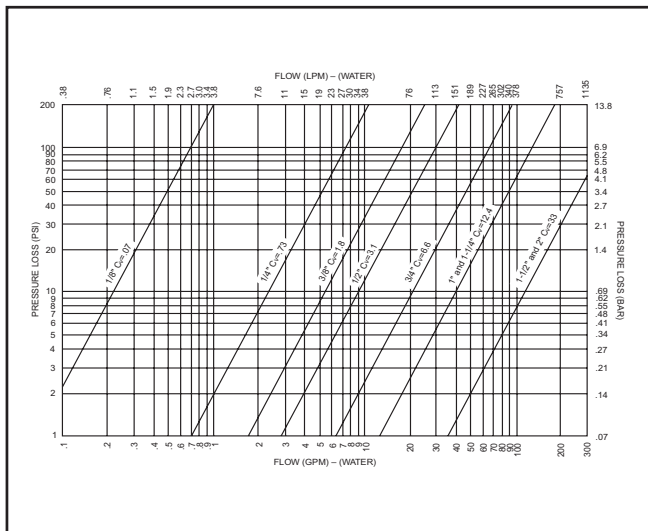

MP-1 SERIES



Features:

- Economical medium-pressure poppet design
- Two-piece construction for end fitting versatility
- Anti-extrusion seal
- Multitude of seals and materials to handle gases, fluids and vacuums in a wide range of pressures and temperatures
- Streamline valve design for high flow with minimal pressure drop
- Seal and poppet design are wear and pressure compensated for positive shut-off with zero leakage

Pressures:

To 3,000 psig (207 bar) (For higher pressure consult factory)

Sizes:

1/4" through 4" (larger sizes are available)

Materials:

Steel with platings or coatings to customer specifications and stainless steel to meet your pressure and environmental requirements

Shut-off Combination:

Double shut-off/Single shut-off

