


Hose information is subject to change. For full details, visit our website or contact Customer Service.

TULINE WELDING, GRADE T

Flex Strength® Tuline Welding hose is lightweight, flexible and available from stock in a wide range of sizes. The hoses come in two popular grades, T and R. Both grades come in single line and tuline styles, with or without corrugated covers. Each of these styles and grades features multi-spiral construction for maximum kink resistance. They have a specially designed cover with multi-ventilated pores that enhance welder safety by dispersing permeating gases. All Thermoid Flex Strength Welding hose meets or exceeds the requirements of RMA and the Compressed Gas Association. These hoses are manufactured to a 4-1 safety factor. The air mandrel cure eliminates clogged nozzles, assures a non-contaminated tube and promotes an even flow of gas to the nozzles.

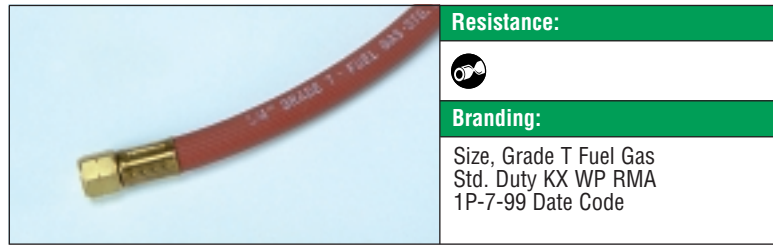

Grade T

- Cover Color:** Red, Green
- Fuel Resistance:** Medium - High - (All Fuel Gases)
- Construction:**
 - Tube:** Polychloroprene (CR)
 - Cover:** Polychloroprene (CR)
 - Reinforcement:** Spiral polyester yarn
- Temperature Range:** -40°F to +180°F
-40°C to +82°C
- Packaging:** Reels, *Cut and coupled lengths



Grade T

- Cover Color:** Red, Green
- Fuel Resistance:** Medium - High - (All Fuel Gases)
- Construction:**
 - Tube:** Polychloroprene (CR)
 - Cover:** Polychloroprene (CR)
 - Reinforcement:** Spiral polyester yarn
- Temperature Range:** -40°F to +180°F
-40°C to +82°C
- Packaging:** Reels, *Cut and coupled lengths