

# 2" Full Port Ball Valve Factory Assembled Design Options

## FEATURES


- Full combination of threaded and adapter ends
- Molded-in nipples and adapters



## 2" BOLTED BALL VALVE

ITEM	DESCRIPTION	PART NO.	STD. PKG	
			QTY	WT
A	2" Full Port M X F	60112-A	8	26
B	2" Full Port M X M Adapters	60112-C	8	26
C	2" Full Port F X M Adapters	60112-D	8	26

Operating Pressure  
100 psi max @ 70° F  
75 psi max @ 150° F

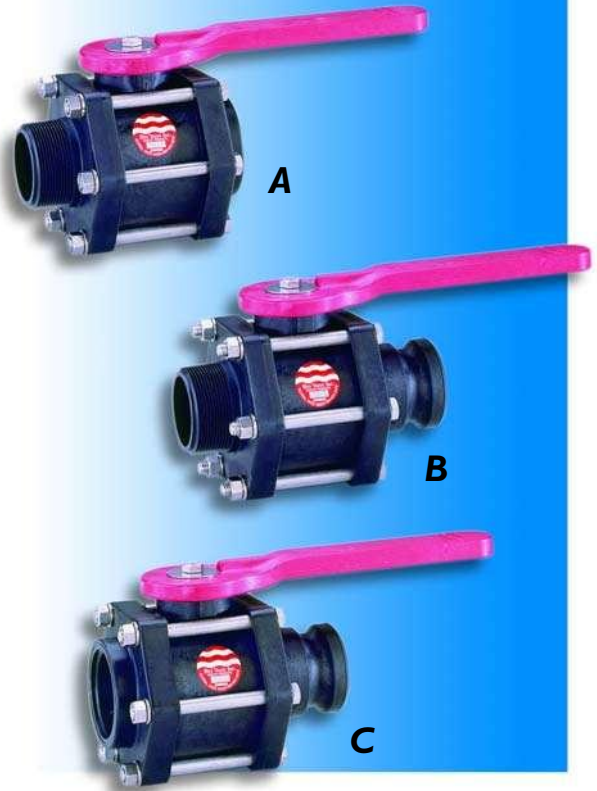

## Flange Ball Valves

## FEATURES

- Single and double flange designs
- ANSI standards 4-bolt, low pressure flange



## FLANGE VALVES

ITEM	DESCRIPTION	PART NO.	STD. PKG.	
			QTY	WT
A	2-1/2" Full Port w/4" ANSI Flange one end	6011W-20	4	25
A	3" Standard Port w/4" ANSI Flange one end	6011F-20	4	25
B	3" Standard Port w/4" ANSI Flange both ends	4011M-20	4	32

Operating Pressure  
75 psi max @ 70° F

