


FTHN - White
 Nitrile Tube with Gray
 Nitrile Cover and White Stripe
 Temperature Range:
 FTHN -40°F to +225°F (-18°C to +107°C)

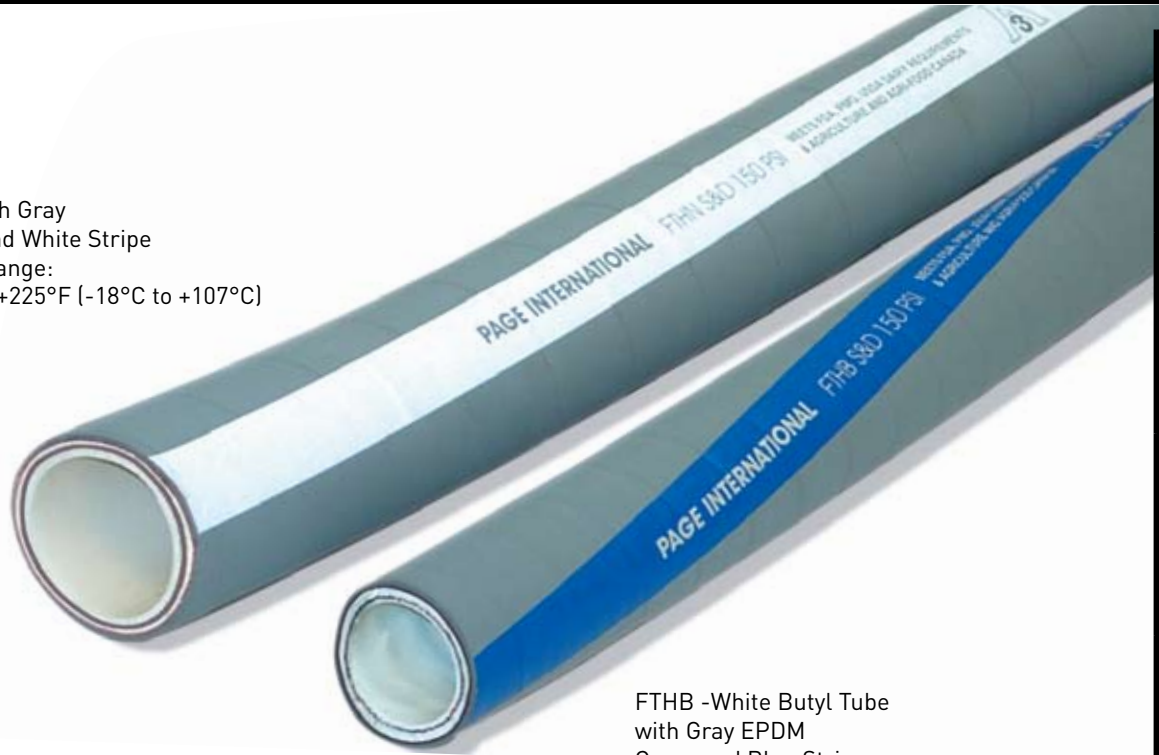

FTHB -White Butyl Tube
 with Gray EPDM
 Cover and Blue Stripe
 Temperature Range:
 FTHB -40°F to +250°F (-18°C to +121°C)

FTHN & FTHB

Part Number	Hose ID	Hose OD	Working Pressure	Minimum Burst Pressure	Vacuum Rating	Minimum Bend Radius	Weight
Nitrile Tube	Inch (MM)	Inch (MM)	PSI @ 72°F (Bars @ 22°C)	PSI @ 72°F (Bars @ 22°C)	In. Hg. @ 72°F (Kg/Sq.CM @ 22°C)	Inch (MM)	Lbs./Ft. (Kgs/M)
(Butyl Tube)							
08-FTHN	0.50	0.95	350	1400	29.9	2.00	0.37
(08-FTHB)	(12.7)	(24.1)	(24.1)	(96.5)	(1.0)	(50.8)	(0.55)
12-FTHN	0.75	1.25	350	1400	29.9	3.00	0.55
(12-FTHB)	(19.0)	(31.7)	(24.1)	(96.5)	(1.0)	(76.2)	(0.81)
16-FTHN	1.00	1.53	300	1200	29.9	4.00	0.68
(16-FTHB)	(25.4)	(38.8)	(20.6)	(82.7)	(1.0)	(101.6)	(1.01)
20-FTHN	1.25	1.74	250	1000	29.9	5.00	0.95
(20-FTHB)	(31.7)	(41.2)	(17.2)	(68.9)	(1.0)	(127.0)	(1.41)
24-FTHN	1.50	2.13	250	1000	29.9	6.00	1.22
(24-FTHB)	(38.1)	(54.1)	(17.2)	(68.9)	(1.0)	(152.4)	(1.81)
32-FTHN	2.00	2.68	250	1000	29.9	7.00	1.68
(32-FTHB)	(50.8)	(68.0)	(17.2)	(68.9)	(1.0)	(177.8)	(2.50)
40-FTHN	2.50	3.30	150	600	29.9	8.00	2.42
(40-FTHB)	(63.5)	(83.8)	(10.3)	(41.4)	(1.0)	(203.2)	(3.60)
48-FTHN	3.00	3.88	150	600	29.9	9.00	3.15
(48-FTHB)	(76.2)	(98.6)	(10.3)	(41.4)	(1.0)	(228.6)	(4.68)
64-FTHN	4.00	4.98	150	600	29.9	12.00	4.67
(64-FTHB)	(101.6)	(126.5)	(10.3)	(41.4)	(1.0)	(1.0)	(6.95)

NOTE: Temperature Range: FTHB -40°F to +250°F (-18°C to +121°C) * FTHN -40°F to +225°F (-18°C to +107°C)

All ratings based on 72°F (22°C) - All dimensions nominal - Working pressures and vacuum ratings may vary depending upon end connections and process and temperature parameters.

Smoothbore
PTFE Hose

Convuluted
PTFE Hose

Flare Seal
Hose

Silicone
Hose

Specialty
Hoses

Fittings

Accessories

Technical
Help

Warranty



Parker Hannifin, Parflex Division



Call Toll Free: **1-866-711-4673**
 WebSales@GoodyearRubberProducts.com

**We Ship
World Wide**