

WHITE FOOD BELT




#104 3 Ply Polyester 105 White Teflon x Friction Surface

Excellent belt specification for conveying wet sticky materials and uses involving spreading, gluing, and coating. Characteristics of release are the best of rubber like compounds. The strong, flexible carcass is covered with a thin teflon film. Meets FDA requirements; is USDA accepted.

Temperature range: 0° F to 275° F. **Thickness:** 3/32". **Weight:** .052 piw.

Minimum pulley diameter: 2 1/2". **Recommended fasteners:** #1SP Hook, #62 Staple, #7 Alligator.

Part Number: 20028625

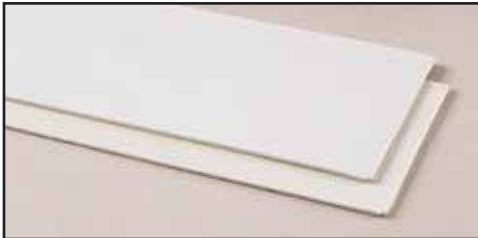

#223 2 Ply White Urethane x IMPG Bottom Static Conductive

High quality smooth, non-adhesive urethane top cover. Ideally suited for food conveying and processing. Hard cover with good release characteristics for sticky material. Monofilament polyester carcass with anti-static properties that are excellent for flat slide bed and roller conveyors. FDA/USDA approved.

Temperature range: 20° F to 180° F. **Thickness:** 1/16". **Weight:** .025 piw. **Minimum pulley diameter:** 1/2". **Working tension:** 46 lbs. piw. **Recommended fasteners:** #2SP, UCM36 SP, 00 Alligator.

Part Number: 24041040



#224 2 Ply White PVC x IMPG Bottom Static Conductive

This belt has anti-static properties and is excellent for cleated profiles. It is ideally suited for general food conveying and processing, also excellent for bottom slide bed and roller conveyors. Applications include food processing such as transporting dry, fatty, oily, and watery foodstuffs. FDA/USDA approved.

Temperature range: 20° F to 180° F. **Thickness:** 5/64". **Weight:** .042 piw. **Minimum pulley diameter:** 1". **Working tension at 1% tension:** .67 lbs. piw.

Recommended fasteners: #25 LP Hook, #62 Staple, #1 Alligator.

Part Number: 24041010



#252 3 Ply 150 White RMV Cross Rigid Static Conductive x Bare Back

This specification is used for conveyor systems requiring corrugated sidewalls. Belt is a plied polyester heavy-duty thermoplastic, specially woven for transverse rigidity. It can be cleated with hot welded profiles, it resists static build up and has the superior ability to remain flat. Meets FDA requirements; is USDA accepted.

Temperature range: 20° F to 180° F. **Thickness:** 11/64". **Weight:** .083 piw. **Minimum pulley diameter:** 3". **Recommended fasteners:** #2 Hook, RS#125 Staple, #20 Alligator.

Part Number: 20032953



#230 4 Ply 200 White RMV Cross Rigid Static Conductive x Bare Back

This specification is used for conveyor systems requiring corrugated sidewalls. It is a plied polyester heavy-duty thermoplastic belt specially woven for transverse rigidity. It can be cleated with hot welded profiles, it resists static buildup and has the superior ability to remain flat. Meets FDA requirements; is USDA accepted.

Temperature range: 20° F to 180° F. **Thickness:** 7/32". **Weight:** .140 piw. **Minimum pulley diameter:** 8". **Recommended fasteners:** #187 Staple, #27 Alligator.

Part Number: 20038225



#67B 2 Ply PVG 220 White 1/16 x 1/16 Static Conductive

Excellent heavy duty food grade belt. Excellent for handling bulk foods such as salt, sugar, and grain. Good elevator belt with anti-static properties.

Temperature range: 20° F to 180° F. **Thickness:** 1/4". **Weight:** .126 piw.

Minimum pulley diameter: 8". **Recommended fasteners:** #4 Hook, #187 Staple, #27 Alligator, #140 Solid Plate, #375 Bolt On, #R5 Rivet.

Part Number: 20038509