


GS



Size Range (In) stock 1" to 12"
 Standard Length (Ft) 12'
 Standard Colors iron oxide red
 Temperature Range (°F) -65° to 550°
 intermittent to 600°

- Double-ply silicone coated fiberglass fabric hose reinforced with a spring steel wire helix & external filament fiberglass cord
- Suited for high temperature air handling applications
- The narrow pitch allows for tight bending radius while maintaining a smooth air flow
- Ideal for plastic processing applications
- Non-kinking
- Resistant to many oils & solvents, ozone, water, fungus & alkalis
- Not recommended for continuous flexing



CWGS



Size Range (In) stock 2" to 12"
 Standard Length (Ft) 25'
 Standard Colors iron oxide red
 Temperature Range (°F) -65° to 550°

- Single-ply silicone coated fiberglass fabric hose reinforced with a spring steel wire helix
- Light weight & flexible
- Available in longer lengths than traditional mandrel-built hose
- Resistant to many oils & solvents, ozone, water, fungus & alkalis
- Not recommended for continuous flexing




BDS



Size Range (In) stock 1" to 8"
 Standard Length (Ft) 12'
 Standard Colors iron oxide red
 Temperature Range (°F) -65° to 500°

- Single-ply silicone coated fiberglass fabric hose reinforced with a spring steel wire helix & external filament fiberglass cord
- Suited for high temperature air handling applications
- The narrow pitch allows for tight bending radius while maintaining a smooth air flow
- Non-kinking
- Resistant to many oils & solvents, ozone, water, fungus & alkalis
- Not recommended for continuous flexing

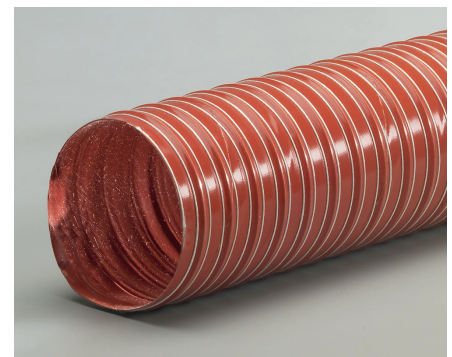

CW-325



Size Range (In) stock 2" to 12"
 custom to 16"
 Standard Length (Ft) 25'
 Standard Colors black
 Temperature Range (°F) -20° to 325°

- Single-ply acrylic coated polyester fabric hose reinforced with a spring steel wire helix
- Ideal for air & fume handling applications
- Excellent choice for overhead vehicle exhaust systems
- Light weight & flexible
- Listed as UL 94V-0 flame retardant
- Available with an external PVC wearstrip (CW-325-W)

