

STYLE CG & CGI TO ASME B16.20
TO SUIT LARGE DIAMETER ASME B16.47 SERIES A FLANGES
CLASS 150-300

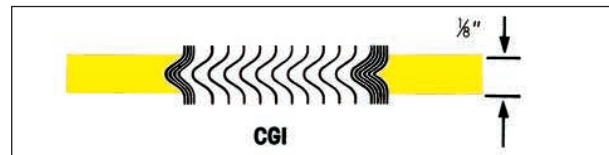
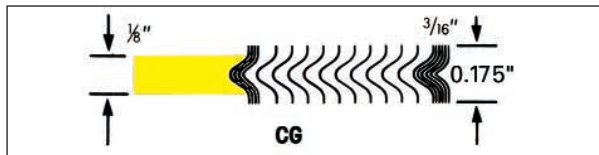


TABLE
7

CLASS 150				
Nom. Pipe Size	Inner Ring Inside Dia.	Sealing Element		Centering Ring Outside Dia.
		Inside Dia.	Outside Dia.	
22	—	22 ³ / ₄	24	26
26	25 ³ / ₄	26 ¹ / ₂	27 ³ / ₄	30 ¹ / ₂
28	27 ³ / ₄	28 ¹ / ₂	29 ³ / ₄	32 ³ / ₄
30	29 ³ / ₄	30 ¹ / ₂	31 ³ / ₄	34 ³ / ₄
32	31 ³ / ₄	32 ¹ / ₂	33 ⁷ / ₈	37
34	33 ³ / ₄	34 ¹ / ₂	35 ⁷ / ₈	39
36	35 ³ / ₄	36 ¹ / ₂	38 ¹ / ₈	41 ¹ / ₄
38	37 ³ / ₄	38 ¹ / ₂	40 ¹ / ₈	43 ³ / ₄
40	39 ³ / ₄	40 ¹ / ₂	42 ¹ / ₈	45 ³ / ₄
42	41 ³ / ₄	42 ¹ / ₂	44 ¹ / ₄	48
44	43 ³ / ₄	44 ¹ / ₂	46 ³ / ₈	50 ¹ / ₄
46	45 ³ / ₄	46 ¹ / ₂	48 ³ / ₈	52 ¹ / ₄
48	47 ³ / ₄	48 ¹ / ₂	50 ³ / ₈	54 ¹ / ₂
50	49 ³ / ₄	50 ¹ / ₂	52 ¹ / ₂	56 ¹ / ₂
52	51 ³ / ₄	52 ¹ / ₂	54 ¹ / ₂	58 ³ / ₄
54	53 ¹ / ₂	54 ¹ / ₂	56 ¹ / ₂	61
56	55 ¹ / ₂	56 ¹ / ₂	58 ¹ / ₂	63 ³ / ₄
58	57 ¹ / ₂	58 ¹ / ₂	60 ¹ / ₂	65 ¹ / ₂
60	59 ¹ / ₂	60 ¹ / ₂	62 ¹ / ₂	67 ¹ / ₂

CLASS 300				
Nom. Pipe Size	Inner Ring Inside Dia.	Sealing Element		Centering Ring Outside Dia.
		Inside Dia.	Outside Dia.	
22	—	22 ³ / ₄	24 ³ / ₄	27 ³ / ₄
26	25 ³ / ₄	27	29	32 ⁷ / ₈
28	27 ³ / ₄	29	31	35 ³ / ₈
30	29 ³ / ₄	31 ¹ / ₄	33 ¹ / ₄	37 ¹ / ₂
32	31 ³ / ₄	33 ¹ / ₂	35 ¹ / ₂	39 ⁵ / ₈
34	33 ³ / ₄	35 ¹ / ₂	37 ¹ / ₂	41 ⁵ / ₈
36	35 ³ / ₄	37 ³ / ₈	39 ³ / ₈	44
38	37 ¹ / ₂	38 ¹ / ₂	40	41 ¹ / ₂
40	39 ¹ / ₂	40 ¹ / ₄	42 ¹ / ₈	43 ⁷ / ₈
42	41 ¹ / ₂	42 ¹ / ₄	44 ¹ / ₈	45 ⁷ / ₈
44	43 ¹ / ₂	44 ¹ / ₂	46 ¹ / ₂	48
46	45 ⁵ / ₈	46 ³ / ₈	48 ³ / ₈	50 ⁵ / ₈
48	47 ⁵ / ₈	48 ⁵ / ₈	50 ⁵ / ₈	52 ⁵ / ₈
50	49	51	53	54 ¹ / ₄
52	52	53	55	56 ¹ / ₄
54	53 ¹ / ₄	55 ¹ / ₄	57 ¹ / ₄	58 ³ / ₄
56	55 ¹ / ₄	57 ¹ / ₄	59 ¹ / ₄	60 ³ / ₄
58	57	59 ¹ / ₂	61 ¹ / ₂	62 ³ / ₄
60	60	61 ¹ / ₂	63 ¹ / ₂	64 ³ / ₄

DIMENSIONS IN INCHES.

The above style CG gasket dimensions are also suitable for NPS 26 to 48 class 150 and NPS 26 to 36 class 300 BS 3293 flanges.

THE ANSWER IS ALWAYS

Flexitallic

GOODYEAR
RUBBER PRODUCTS INC.

Call Toll Free: **1-866-711-4673**

WebSales@GoodyearRubberProducts.com

**We Ship
World Wide**