

AIR BRAKE - ACCESSORIES**AIR BRAKE HOSES****AIR BRAKE HOSE**

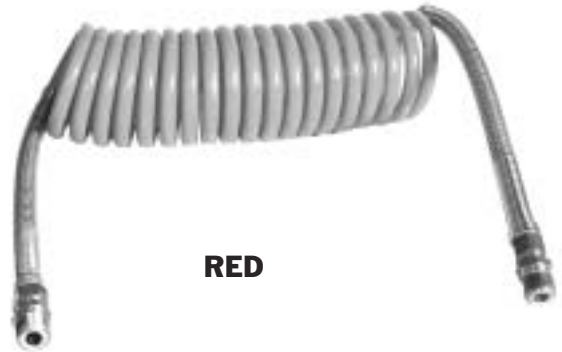
- Spiral synthetic cord reinforcement with neoprene cover.
- 40° F to +200° F temperature range.
- Max operating pressure 255 psi
- Max burst pressure 900 psi
- Meets SAE J1402

Part #	ID	OD	Length	List Price
38-910	3/8	3/4	50'	122.89
38-915	1/2	7/8	50'	125.83

REMOTE CONTROL DRAIN VALVES**REMOTE CONTROL DRAIN VALVES**

- Brass Body and stainless steel spring
- Steel cable, nylon coated, certified to 200lbs pull test.
- Low profile to minimize accidental hits and damages.
- Pipe thread 1/4" NPTF.
- To order pre-coated pipe threads, add prefix "P" to the part number.

Part #		List Price
46-492	Standard 48"	31.09
46-493	Standard 60"	31.09

BRASS FITTINGS**COILED AIRBRAKE TUBE ASSEMBLIES****RED****Blue**

- Conforms to SAE J844 Type B and SAE J1131.
- Conforms to DOT FMVSS 571. 106.
- Maximum Working Pressure 150 PSI,
- Minimum Burst 950 PSI.
- Temperature Range -40° F to 200° F.
- Brass end with spring guards and 1/2" male pipe connectors.
- Spring guards zinc plated for maximum corrosion resistance.
- Color coding, red for emergency and blue for service, provides you with error free installation.
- Preassembled for immediate installation.
- 1/2" O.D. with 1/2" fitting.

Each contains 1 red, 1 blue.

Part #	Working Length	Pigtail Length	List Price
38-700	12'	6"	127.64
38-705	12'	12"	212.27
38-710	15'	12"	141.83

I have a tip that can take five strokes off anyone's golf game: It's called an eraser."

-Arnold Palmer

MIDLAND METAL**GOODYEAR**
RUBBER PRODUCTS INC.**Call Toll Free: 1-866-711-4673**

WebSales@GoodyearRubberProducts.com

**We Ship
World Wide**