


NOMINAL SIZE	inch	2"	3"	4"	5"	6"
APPROX. O.D.	inch	2.44	3.54	4.65	5.73	6.98
RECOMMENDED W.P. AT 68°F	psi	40	35	35	30	30
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	4	6	8	12	15
APPROX. B.P. AT 68°F	psi	120	105	105	90	90
APPROX. WT.	lbs./ft.	.58	1.08	1.71	2.41	4.22

* BEND RADIUS FOR CONTINUOUS SERVICE.

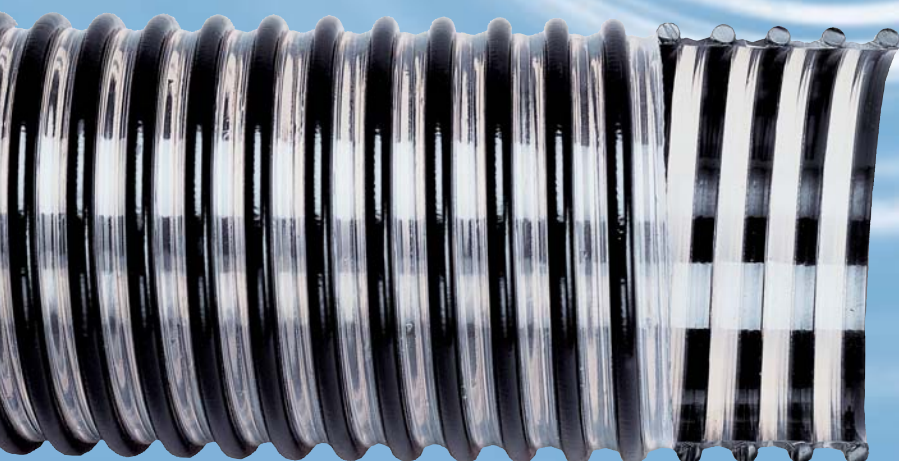

NOMINAL SIZE	inch	4"	5"
APPROX. O.D.	inch	4.49"	5.69"
RECOMMENDED W.P. AT 68°F	psi	15	10
RECOM. MIN. BEND RADIUS AT 68°F*	inch	6"	10"
APPROX. B.P. AT 68°F	psi	54	30
APPROX. WT.	lbs./ft.	.97	1.61

* BEND RADIUS FOR CONTINUOUS SERVICE.

SPIRALITE[®] 920

PVC-POLYURETHANE BLEND MATERIAL HANDLING HOSE

- **APPEARANCE/CONSTRUCTION:**

Milky-white PVC/Polyurethane tube with white PVC helix.
Corrugated cover, smooth tube.

- **BENEFITS:**

– Excellent combination of flexibility and abrasion resistance.

- **GENERAL APPLICATIONS:**

– Abrasive material handling.
– Transferring bark, straw and mulch for lawn care.
– Handling insulation materials.

- **TEMPERATURE RANGE:**

-10°F to +130°F

- **STANDARD LENGTHS:**

2" thru 6" 100ft.

SPIRALITE[®] 940

PVC - POLYURETHANE BLEND DUCT AND BLOWER HOSE

- **APPEARANCE/CONSTRUCTION:**

Clear PVC/Polyurethane wall with black helix.
Corrugated wall, and smooth interior.

- **BENEFITS:**

– Unique blend of material provide excellent abrasion resistance.

- **GENERAL APPLICATIONS:**

– Material conveying.
– Transferring abrasive applications.
– Bark blowing applications.

- **TEMPERATURE RANGE:**

-10°F to 130°F

- **STANDARD LENGTHS:**

4" and 5" 100ft.