


NOMINAL SIZE	inch	1"	11/4"	11/2"	2"	3"	4"	6"	8"	10"
APPROX. O.D.	inch	1.38	1.66	1.89	2.45	3.61	4.73	7.13	9.29	11.49
RECOMMENDED W.P. AT 68°F	psi	100	100	100	100	100	75	70	50	35
APPROX. B.P. AT 68°F	psi	400	400	280	280	280	200	180	150	105
VACUUM RATING AT 68°F	in/HG	28	28	28	28	28	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	3"	3"	4"	5"	7"	8"	12"	30"	44"
APPROX. WT.	lbs./ft.	.27	.33	.36	.54	1.07	1.74	3.81	5.00	7.48

^{*} BEND RADIUS FOR CONTINUOUS SERVICE.

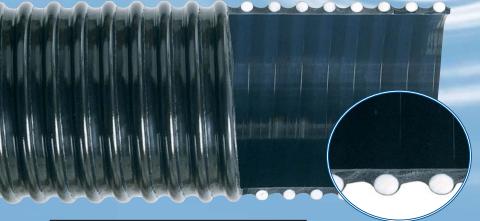

NOMINAL SIZE	inch	2"	21/2"	3"	4"
APPROX. O.D.	inch	2.51	3.05	3.57	4.73
RECOMMENDED W.P. AT 68°F	psi	45	45	40	35
VACUUM RATING AT 68°F	in/HG	28	28	28	28
RECOM. MIN. BEND RADIUS AT 68°F*	inch	3	4	5	8
APPROX. B.P. AT 68°F	psi	135	135	120	110
APPROX. WT.	lbs./ft.	.68	.96	1.15	1.94

^{*} BEND RADIUS FOR CONTINUOUS SERVICE.

SPIRALITE 6200

BRAIDED CLEAR PVC CORRUGATED HOSE

• APPEARANCE/CONSTRUCTION:

Clear PVC with corrugated white helix containing a braided reinforcement.

RENEFITS:

- Clear wall allows easy inspection of material flow.
- Smooth inside prevents material blockage.
- Exposed helix, less resistance to dragging.
- Braided wall handles higher pressures.
- Braided construction reduces elongation during application.

GENERAL APPLICATIONS:

 General suction for water & light chemical solutions.

• TEMPERATURE RANGE:

-10°F to +130°F

• STANDARD LENGTHS:

1" thru 6" 100ft. 8" and 10" 20ft. and 40ft.

SPIRALITE®U125

POLYURETHANE LINED PVC SUCTION HOSE

• APPEARANCE/CONSTRUCTION:

Black PVC cover with white helix. Corrugated outside, smooth polyurethane tube.

• BENEFITS:

- Compounded for outstanding adhesion between wall and lining.
- Excellent abrasion resistance.

• GENERAL APPLICATIONS:

- Abrasive material handling.
- Shot blast recovery lines.
- Industrial vacuums.
- Pellet & grain transfer.

• TEMPERATURE RANGE:

-10°F to +130°F

• STANDARD LENGTHS:

2" thru 4"

100ft.