

Stainless Steel Ball Valves Series 501SS

Advantages

Parker's Cast Body is manufactured from CF-8M Stainless Steel, the cast equivalent of 316 Stainless Steel. They are ideal for corrosive environments such as chemical plants and refineries. The full flow design assures maximum operating efficiency. The reinforced PTFE seats and seals, coupled with the 316 Stainless Ball and blow-out proof stem, result in the utmost reliability. This ball valve is available in 1/4", 3/8", 1/2", 3/4" and 1" female pipe sizes.


Applications/Approvals

Parker's industrial ball valve product line is intended for general purpose use. Please be aware that ball valves are intended for use in the fully open or closed positions. Depending on application conditions, throttling of the valve may result in premature seal failure and/or inability to turn the valve handle.

Applications include chemical plants, refineries, steel mills, industrial fuel lines and agricultural equipment. Meets material requirements of NACE MR-01-75.

Working Pressure/Temperature

Saturated steam service rating up to 150 PSI and 400° F.

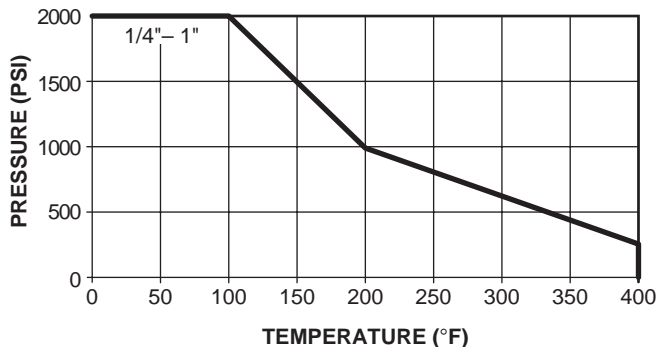

Operating Instructions

Quarter turn is "ON" or "OFF".
(Provides positive stop action for full shutoff.)

NOTE: PERIODICALLY CHECK THE ADJUSTABLE PACKING NUT AND TIGHTEN AS REQUIRED.

Style	Type	Material	Size	Options
V	501	SS	-4	-00
Style	V-Valve			
Type	501-Male/Female NPT Ports			
Material	SS-Stainless Steel			
Size	4-1/4" 6-3/8" 8-1/2" 12-3/4" 16-1"			

Flow data

VALVE SIZE	CV
1/4	4.0
3/8	6.0
1/2	14.0
3/4	35.0
1	54.0

