


Accessory Selection Guide – Partek Sleeve (AS-B, AS-Y or PS)

Parker's Partek Nylon Protective Sleevings gives you tough hose abrasion protection two ways. First, per the ISO 6945 specification, Partek has a unique tubular weave nylon construction, Partek "AS" is strong enough to withstand greater than 200,000 abrasion cycles without wearing through the fabric at any location. Partek "PS" can withstand greater than 50,000 abrasion cycles. In addition, this weave also gives an exceptionally smooth interior wall, allowing rubber hose to move freely inside the sleeve. This provides easy installation and prevents any internal abrasion problems. Partek sleeving is available in either black or yellow and in sizes to fit most hydraulic hose. Partek, the quick and easy solution to hose protection in high-abrasion areas.

Temperature Range: -67°F to +248°F (-53°C to +120°C)

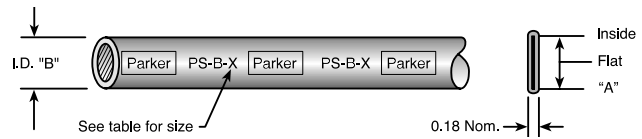

Note: The inside flat "A" dimension corresponds with the inside diameter "B" dimension. For example, AS-Y-13 flat surface "A" is 1.34 in. This offers a .86 in. inside diameter "B". Hose with a smaller O.D. can be specified for this size sleeve. Parker 201-5 hose has a .58 in. O.D. and can easily be inserted in the Partek AS-Y-13 Sleeve.



Partek Sleeve



Partek "PS" Sleeve

Partek Sleeve (Black) Part Number	Partek Sleeve (Yellow) Part Number	Partek PS Sleeve (Black) Part Number	Inside Dia.		SS23CG SS25UL 201 221FR 206, 225	213 285 293	302 301LT 304 341 421WC BXX	422, AX, 424 426, 431, 436 351TC/ST 451TC/ST 471TC/ST 472TC 482TC/ST	601	701 721, 721TC 772TC/ST 774 782TC/ST 792TC/ST	731 P35, 781 782TC/ST 791TC 792TC/ST	801 804 821 821FR 831, 836	811 881 881HT
			A inch	B inch									
AS-B-11	AS-Y-11		1.07	0.69	-4	-4						-4	
AS-B-13	AS-Y-13	PS-B-13	1.34	0.86	-5/-6	-5/-6	-4/-5	-5/-6	-4/-5			-5/-6	
AS-B-15	AS-Y-15	PS-B-15	1.66	1.06	-8	-8/-10	-6	-8	-6	-6		-8	
AS-B-17	AS-Y-17	PS-B-17	1.92	1.22	-10	-12	-8/-10	-10	-8	-8		-10	
AS-B-19	AS-Y-19	PS-B-22	2.12	1.35	-12		-12	-12	-10	-10	-8	-12	
		PS-B-22	2.24	1.42	-12		-12	-12		-10		-12	
AS-B-22	AS-Y-22	PS-B-22	2.24	1.42	-16	-16			-12	-12	-10		-12
AS-B-27	AS-Y-27	PS-B-33	2.55	1.63				-16			-12	-16	
		PS-B-33	2.85	1.81				-16			-12	-16	
AS-B-33	AS-Y-33	PS-B-33	2.85	1.81	-20	-20	-16		-16	-16	-16		-16
	AS-Y-35	PS-B-35	3.43	2.19	-24	-24		-20					-20
AS-B-37	AS-Y-37	PS-B-37	3.73	2.38			-20	-24		-20	-20		
		PS-B-39	4.12	2.63	-32	-32	-24			-24	-24		-24
		PS-B-45	4.12	2.88			-32	-32			-32		-32
		PS-B-47	4.90	3.13	-40	-40				-32			
AS-B-58			5.69	3.63	-48	-48							-48
AS-B-64			6.18	4.00									

Note: 1. The dimensions shown are related to the hose outside diameter and may not fit over the fitting. For over the fitting applications, a larger size sleeve may be required.
2. Cut lengths are available. Contact your local distributor for prices (www.parkerhose.com).

Hose
A

Fittings
B

Equipment
C

Accessories
D

Technical
E