


## Interlocking Clamp Type Couplings

### Series 7615

### PLATED MALLEABLE IRON/STEEL

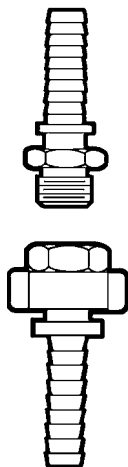

|                     |   |
|---------------------|---|
| <b>Service</b>      | High pressure air, water, steam, petroleum products, and chemicals  |
| <b>Description</b>  | Plated malleable iron wing nut with either malleable iron or steel stem and spud. NPT male and NPT female spud. Female wing nut-to-spud connection is NPSM ground joint or washer seal. |
| <b>Attachment</b>   | Interlocking clamp series 7692  |
| <b>Manufacturer</b> | Dixon Value & Coupling  |

| Hose ID (in.) | NPT Thread Size (in.) | Female Ground Joint | Female Washer Type | Male for Either Female |
|---------------|-----------------------|---------------------|--------------------|------------------------|
| ¼             | ¼                     | -250FGJ             | -250FW             | -250M                  |
| ⅜             | ⅜                     | -380FGJ             | -380FW             | -380M                  |
| ½             | ½                     | -500FGJ             | -500FW             | -500M                  |
| ¾             | ¾                     | -750FGJ             | -750FW             | -750M                  |
| 1             | 1                     | -1000FGJ            | -1000FW            | -1000M                 |
| 1¼            | 1¼                    | -1250FGJ            | -1250FW            | -1250M                 |
| 1½            | 1½                    | -1500FGJ            | -1500FW            | -1500M                 |
| 2             | 2                     | -2000FGJ            | -2000FW            | -2000M                 |
| 2½            | 2½                    | -2500FGJ            | -2500FW            | -2500M                 |
| 3             | 3                     | -3000FGJ            | -3000FW            | -3000M                 |
| 4             | 4                     | -4000FGJ            | -4000FW            | -4000M                 |