


**Polyethylene Tubing**

Laboratory Grade E Series  
1/4 through 5/8 inch O. D.

Minimum  
Burst  
Pressure  
(PSIg)

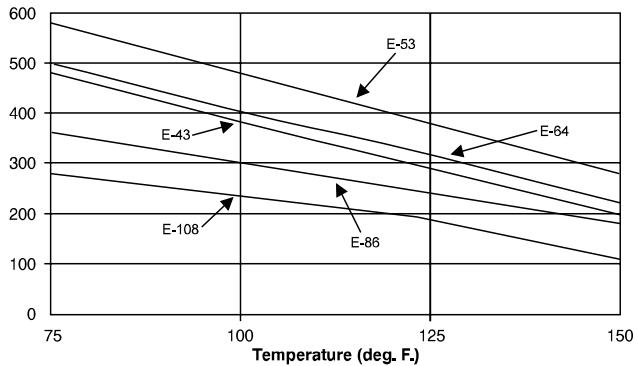


Similar curves for Poly-Flo® sizes

Consult Factory

**Polypropylene Tubing**


PP Series  
1/8 through 5/8 inch O. D.

Minimum  
Burst  
Pressure  
(PSIg)  
(Thousands)

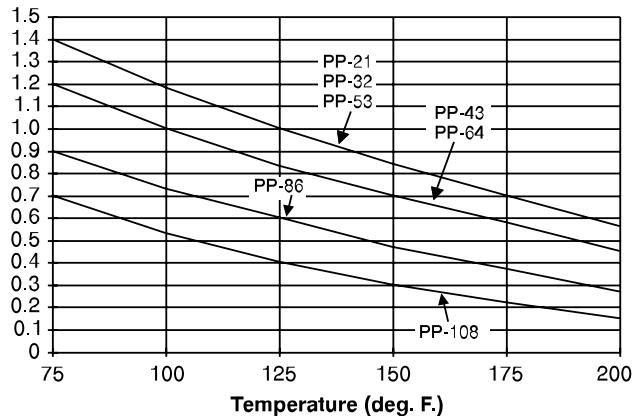**Polyethylene Tubing**

High Density HDPE Series  
1/4 through 5/8 inch O. D.

Minimum  
Burst  
Pressure  
(PSIg)

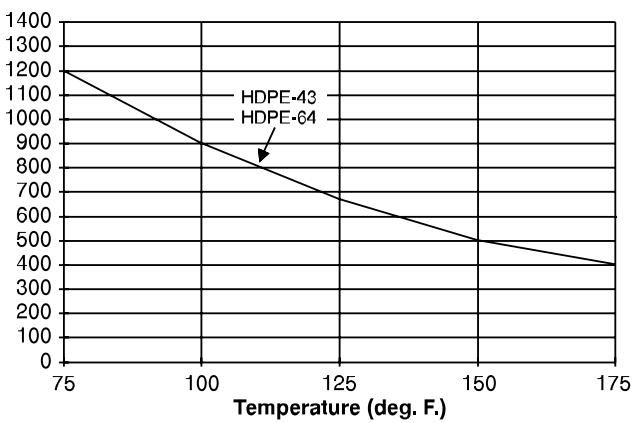

Suggested working pressures of nylon, polypropylene and polyethylene are 1/4 of burst pressure at system operating temperature.  
Suggested working pressure of polyurethane is 1/3 of burst pressure at system operating temperature.