


SS290 BEVERAGE AND POTABLE WATER HOSE - NITRILE TUBE

- Lightweight, sanitary discharge hose designed to handle a wide variety of food and beverage transfer applications.
- Excellent C.I.P. cleaning hose for overhead units.
- Manufactured on stainless steel mandrels for an ultra-smooth bacteria free tube that will not impart taste or odor.

Meets FDA, USDA, 3A, and PMO sanitary requirements.

Tube: Extruded white Nitrile.
Reinforcement: Textile.
Cover: Gray specially compounded Natural Rubber.
Temperature: -40° to +160°F.

I.D.	O.D.	REINFORCEMENT	WORKING PRESSURE PSI	WEIGHT LB/FT
1 1/2"	2 1/8"	4 plies	250	.82
2"	2 5/8"	4 plies	250	1.10
2 1/2"	3 1/8"	4 plies	250	1.39
3"	3 5/8"	4 plies	250	1.64
4"	4 5/8"	4 plies	250	2.21

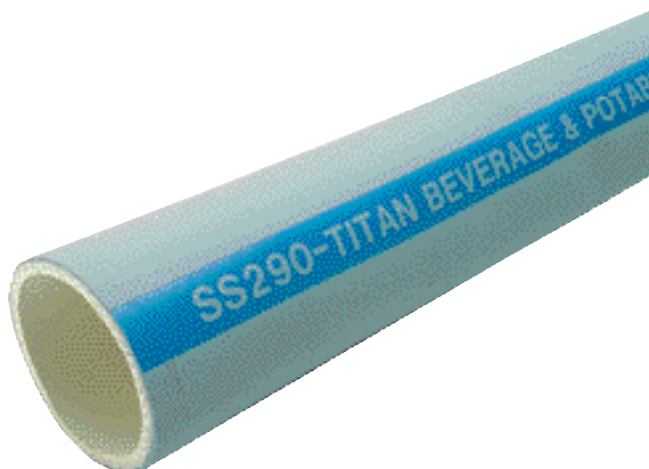


SW319 FOOD SUCTION HOSE - EPDM TUBE

- Premium quality, high temperature food hose designed for sanitary suction and hot air blower service in food applications.
- Dual helix design offers full vacuum capabilities.
- Lightweight construction offers excellent flexibility for handling ease.
- Manufactured on stainless steel mandrels for an ultra-smooth bacteria free tube that will not impart taste or odor.

Meets FDA, USDA, 3A, and PMO sanitary requirements.

Tube: Extruded white EPDM.
Reinforcement: Textile with dual wire helix.
Cover: Gray EPDM.
Temperature: -20° to +225°F

I.D.	O.D.	BEND RADIUS	WORKING PRESSURE PSI	WEIGHT LB/FT	VACUUM
1 1/4"	1 13/16"	5"	250	.75	Full
1 1/2"	2 1/16"	6"	250	.86	Full
2"	2 5/8"	7"	200	1.27	Full
2 1/2"	3 3/16"	10"	200	1.75	Full
3"	3 11/16"	12"	150	2.25	Full

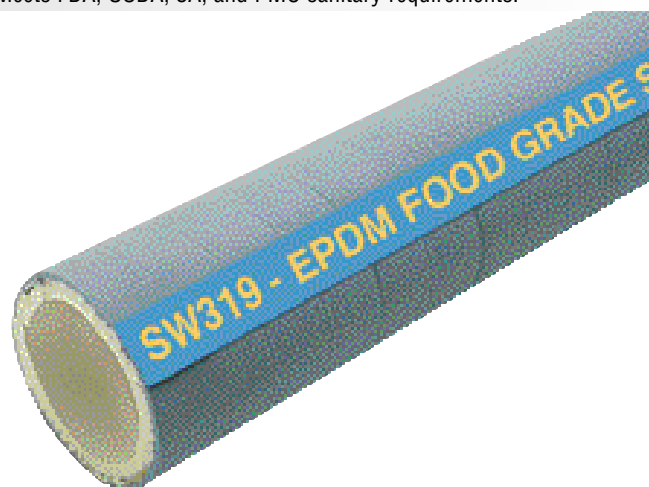

SW330 SANITARY SUCTION & DISCHARGE HOSE - CHLOROBUTYL TUBE

- Premium quality sanitary suction and discharge hose designed to handle non-oily food products.
- Seamless extruded tube is highly resistant to C.I.P. solutions, microbes, and bacteria.

Meets FDA, USDA, 3A, and PMO sanitary requirements.
 Microbe and bacteria resistant tube.

Tube: Extruded white Chlorobutyl.
Reinforcement: Textile with dual wire helix.
Cover: Gray EPDM.
Temperature: -40° to +225°F.

I.D.	O.D.	BEND RADIUS	WORKING PRESSURE PSI	WEIGHT LB/FT	VACUUM
1"	1 5/8"	4"	150	.75	Full
1 1/2"	2 3/16"	6"	150	1.05	Full
2"	2 5/8"	7"	150	1.45	Full
2 1/2"	3 1/4"	8"	150	1.92	Full
3"	3 3/4"	9"	150	2.47	Full
4"	4 3/4"	12"	150	3.25	Full

