

SS106 LPG HOSE WITH STATIC WIRE


- LPG discharge hose designed for bulk unloading.
- Heavy duty construction provides excellent working pressures.
- Pin pricked cover allows for permeation.
- Abrasion resistant cover provides oil and ozone protection.
- Meets all requirements for ISO 2928-1986 (E).

Tube: Extruded enhanced Nitrile.
Reinforcement: Textile with internal static wire.
Cover: Specially compounded Nitrile.
Temperature: -40° to +122°F.

I.D.	O.D.	REINFORCEMENT	WORKING PRESSURE PSI	WEIGHT LB/FT
1 1/4"	1 15/16"	4 plies	350	.77
1 1/2"	2 3/16"	4 plies	350	.91
2"	2 11/16"	4 plies	350	1.20
2 1/2"	3 3/16"	4 plies	350	1.45
3"	3 11/16"	4 plies	350	1.74
4"	4 15/16"	6 plies	350	3.16

Caution: Do not use indoors or for natural gas applications.

Burst pressure 1750 psi on all sizes.

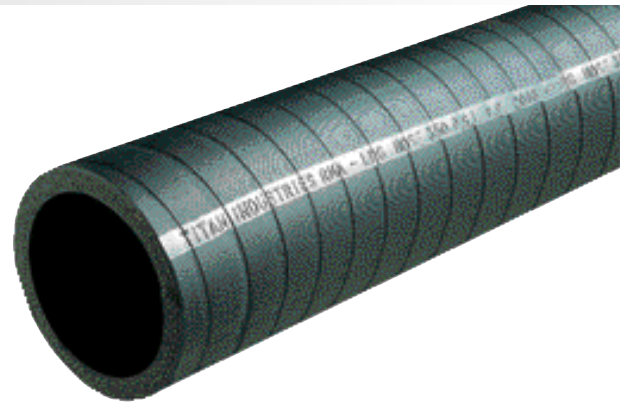

SS107 LIGHTWEIGHT FUEL DISCHARGE HOSE

- Lightweight, easy to handle fuel discharge hose designed for fuel connector service and delivery of petroleum products.
- Abrasion resistant cover provides oil and ozone protection.

Tube: Extruded Nitrile.
Reinforcement: Textile.
Cover: Specially compounded Nitrile.
Temperature: -40° to +180°F.

I.D.	O.D.	REINFORCEMENT	WORKING PRESSURE PSI	WEIGHT LB/FT
1 1/4"	1 5/8"	2 plies	250	.46
1 1/2"	1 7/8"	2 plies	250	.52
2"	2 3/8"	2 plies	200	.67
3"	3 1/2"	2 plies	200	1.14
4"	4 1/2"	2 plies	150	1.46
6"	6 5/8"	2 plies	150	2.96



SS110 MULTI-PURPOSE DISCHARGE HOSE WITH STATIC WIRE

- High pressure multi-purpose discharge hose excellent for air, water, mild oils, and chemicals.

Tube: Extruded specially compounded Nitrile.
Reinforcement: Textile with internal static wire.
Cover: SBR.
Temperature: -40° to +180°F.

I.D.	O.D.	REINFORCEMENT	WORKING PRESSURE PSI	WEIGHT LB/FT
1 1/4"	1 7/8"	4 plies	500	.79
1 1/2"	2 3/16"	4 plies	500	.96
2"	2 3/4"	4 plies	500	1.25
2 1/2"	3 3/8"	6 plies	500	1.96
3"	3 7/8"	6 plies	500	2.27
4"	5"	6 plies	500	3.34
6"	7 1/8"	8 plies	400	5.67

