


Test Points

Test Coupling with Protective Cap DP

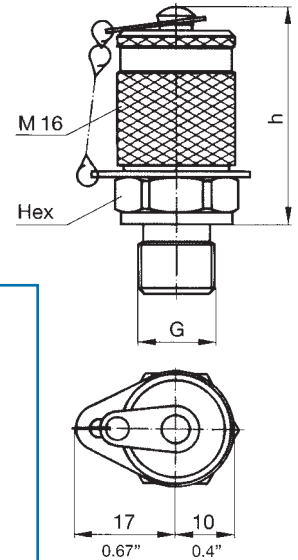

Thread G	h mm/in	Hex mm/in	Brennan Order No.	Description	Seal Type (see below)
1/8 NPT M	36 / 1.42	17 / 0.67	DP2404-02	DTP to MNPT	Taper Type D
1/4 NPT M	35 / 1.38	17 / 0.67	DP2404-04	DTP to MNPT	Taper Type D
5/16-24 UNF	38 / 1.50	17 / 0.67	DP6400-03-O	DTP to MORB	O-Ring Type E
7/16-20 UNF	38 / 1.50	17 / 0.67	DP6400-04-O	DTP to MORB	O-Ring Type E
1/2-20 UNF	38 / 1.50	17 / 0.67	DP6400-05-O	DTP to MORB	O-Ring Type E
9/16-18 UNF	37 / 1.46	19 / 0.75	DP6400-06-O	DTP to MORB	O-Ring Type E
1/8 BSPP M	39 / 1.54	17 / 0.67	DP7002-02-PO	DTP to MBSPP	O-Ring Type C
1/4 BSPP M	37 / 1.46	19 / 0.75	DP7002-04	DTP to MBSPP	Metal Joint Type B
1/4 BSPP M	37 / 1.46	19 / 0.75	DP7002-04-PO	DTP to MBSPP	O-Ring Type C
3/8 BSPP M	37 / 1.46	22 / 0.87	DP7002-06	DTP to MBSPP	Metal Joint Type B
1/8 BSPT M	37 / 1.46	17 / 0.67	DP7000-02	DTP to MBSPT	Taper Type D
1/4 BSPT M	36 / 1.42	17 / 0.67	DP7000-04	DTP to MBSPT	Taper Type D
M08 x 1.0	37 / 1.46	17 / 0.67	DP7005-08	DTP to MMETRIC	O-Ring Type A
M10 x 1.0	37 / 1.46	17 / 0.67	DP7005-10	DTP to MMETRIC	O-Ring Type A
M12 x 1.5	37 / 1.46	17 / 0.67	DP7005-12	DTP to MMETRIC	O-Ring Type C
M14 x 1.5	37 / 1.46	19 / 0.75	DP7005-14	DTP to MMETRIC	Metal Joint Type B
M16 x 1.5	37 / 1.46	22 / 0.87	DP7005-16	DTP to MMETRIC	Metal Joint Type B

Port Connections and Seals

Type A				Type B					Type C					Type D			Type E						
G	d ₁ mm in	t ₁ mm in	t ₂ mm in	G	d ₁ mm/ in	t ₁ mm/ in	t ₂ mm/ in	a mm/ in	G	d ₁ mm/ in	t ₁ mm/ in	t ₂ mm/ in	a mm/ in	G	t ₁ mm in	t ₂ mm in	G	d ₁ mm in	d ₂ mm in	t ₁ mm in	t ₂ mm in	a mm in	
M08 x 1.0	9.5 +0.1 0.37	11 0.43	15.5 0.61	M14 x 1.5	20 0.79	12 0.47	18.5 0.73	1.5 0.06	M12 x 1.5	18 0.71	12 0.47	18.5 0.73	1.5 0.06	1/8 BSPT M	5.5 0.22	9.5 0.37		5/16-24 UNF	9.1 0.36	17 0.67	10 0.39	12 0.47	1.9 0.07
M10 x 1.0	11.5 +0.1 0.45	12 0.47	16.5 0.65	M16 x 1.5	22 0.87	12 0.47	18.5 0.73	1.5 0.06	1/8 BSPP M	15 0.59	8 0.31	13 0.51	1.0 0.04	1/4 BSPT M	8.5 0.33	13.5 0.53		7/16-20 UNF	12.4 0.49	21 0.83	11.5 0.45	14 0.55	2.4 0.09
				1/4 BSPP M	19 0.75	12 0.47	18.5 0.73	1.5 0.06	1/4 BSPP M	19 0.75	12 0.47	18.5 0.73	1.5 0.06	1/8 NPT M	6.9 0.27	11.6 0.46		1/2-20 UNF	14 0.55	23 0.91	11.5 0.45	14 0.55	2.4 0.09
				3/8 BSPP M	23 0.91	12 0.47	18.5 0.73	2 0.08						1/4 NPT M	10 0.39	16.4 0.65		9/16-18 UNF	15.6 0.61	25 0.98	12.7 0.50	15.5 0.61	2.5 0.10