


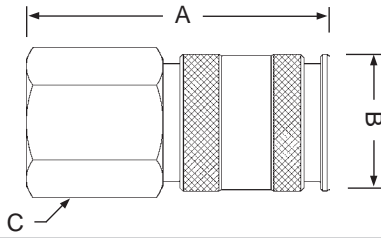


CJ-Series European High Flow Interchange

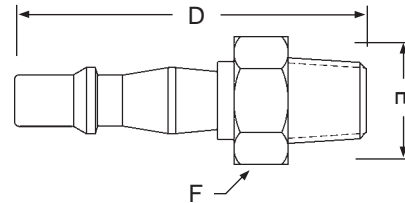



Body Size	End Size	Female NPT(F)	Female BSPP	Female ORB	Male NPT(F)	Male BSPT	Male ORB	Male JIC 37°	Hose Barb	Push-Loc Barb	Reusable Barb	Max. O.D.	Hex Size	
Coupler		Dimension 'A'							'B'	'C'				
1/4"	1/4"	59.0mm	59.0mm		62.0mm	62.0mm			67.0mm	64.0mm	-	23.4mm	3/4"	
1/4"	3/8"	59.0mm	59.0mm		62.0mm	62.0mm			70.0mm	-	-	23.4mm	3/4"	
3/8"	3/8"	64.5mm	64.5mm		67.0mm	67.0mm			77.5mm	67.0mm	-	27.7mm	15/16"	
3/8"	1/2"	68.0mm	68.0mm		70.0mm	70.0mm			76.0mm	-	-	27.7mm	15/16"	
Nipple		Dimension 'D'							'E'	'F'				
1/4"	1/4"	37.5mm	36.0mm		37.5mm	37.5mm			41.5mm	37.0mm		16.2mm	9/16"	
1/4"	5/16"	-	-		-	-			44.5mm	-		13.0mm	-	
1/4"	3/8"	39.5mm	37.5mm		39.5mm	39.5mm			44.5mm	39.5mm		19.6mm	11/16"	
3/8"	3/8"	37.0mm	38.0mm		40.0mm	40.0mm			45.5mm	-		23.1mm	13/16"	
3/8"	1/2"	42.0mm	43.5mm		46.0mm	46.0mm			45.0mm	-		31.2mm	1-1/16"	

CL-Series 'PCL' Interchange

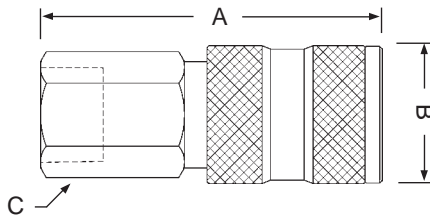

Body Size	End Size	Female NPT(F)	Female BSPP	Female ORB	Male NPT(F)	Male BSPT	Male ORB	Male JIC 37°	Hose Barb	Push-Loc Barb	Reusable Barb	Max. O.D.	Hex Size
Coupler		Dimension 'A'							'B'	'C'			
1/4"	1/4"		60.0mm			60.0mm						24.0mm	3/4"
1/4"	3/8"		60.0mm			61.0mm						24.0mm	3/4"
Nipple		Dimension 'D'							'E'	'F'			
1/4"	1/4"		51.1mm			54.0mm			53.7mm			7.9mm	3/4"
1/4"	3/8"		52.0mm			55.0mm			55.0mm			7.9mm	3/4"

NK-Series Japanese Industrial Interchange

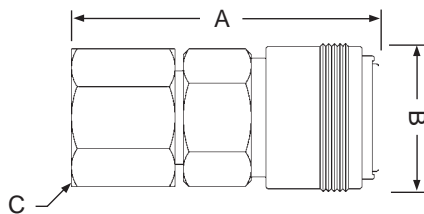

Body Size	End Size	Female NPT(F)	Female BSPP	Female ORB	Male NPT(F)	Male BSPT	Male ORB	Male JIC 37°	Hose Barb	Push-Loc Barb	Reusable Barb	Max. O.D.	Hex Size
Coupler		Dimension 'A'							'B'	'C'			
1/4"	1/4"		50.0mm			54.0mm			61.0mm			26.0mm	3/4"
Nipple		Dimension 'D'							'E'	'F'			
1/4"	1/4"		35.2mm			39.2mm			45.2mm			13.1mm	5/8"

Dimensions